

US-886
Pulidora neumática
Pneumatic polisher

Es una pequeña pulidora neumática con un disco abrasivo de Ø 50 mm. Idónea para los espacios de difícil acceso que encontramos tan a menudo en carrocería y en otros sectores. El disco abrasivo es de fácil intercambio y el soporte que sujeta el disco se adapta a los discos existentes en el mercado.

Is a small pneumatic polisher with a little Ø 50 mm abrasive pad. Suitable for difficult access surfaces that usually we find in the bodywork areas and in other sectors. The abrasive pad is exchangeable easily and the holding pad support is adaptable to all existing pads on the markets.

- Velocidad vacío: 15.000 rpm
Speed empty: 15.000 rpm
- Consumo aire: 99 l/min.
Air consumption: 99 l/min.
- Peso - Weight: 0,6 Kg

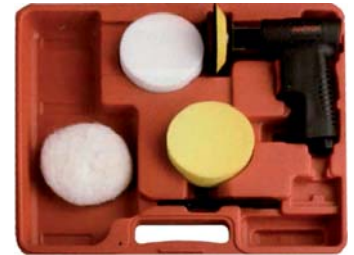


| Art. | Grano Grain | Ø |
|----------|----------------|----|
| US-886/1 | 60 | 3" |
| US-886/2 | 80 | 3" |
| US-886/3 | 100 | 3" |
| US-886/4 | 120 | 3" |

US-1057
Kit mini-pulidora
Mini polisher kit

CE

| | |
|------------------------------------|-------------------|
| Husillo Spindle thread | 1/4"- 20 / M6x1.0 |
| Velocidad en vacío Free speed | 3200 rpm |
| Entrada de aire Air inlet | 1/4" NPT |
| Consumo de aire Air consumption | 91 l/min. |
| Medida plato Pad size | 75 mm |
| Peso estuche Case weight | 1,2 Kg |
| Peso pulidora Polisher weight | 0,72 Kg |
| Longitud Length | 115 mm |


US-1057/1
 Disco abrillantador
 1/2" bonnet

US-1057/2
 Plato amarillo
 Yellow compounding
 pad

US-1057/3
 Plato blanco
 White compounding
 pad

US-390
Desbarbadora amoladora
Angle grinder

CE

| | |
|-------------------------------------|------------|
| Velocidad en vacío Free speed | 8500 rpm |
| Entrada de aire Air inlet | 3/8" gas |
| Consumo de aire Air consumption | 115 l/min. |
| Ø Plato Ø Pad | 175 mm |
| Presión de trabajo Work pressure | 6,2 bar |
| Peso Weight | 3,5 Kg |
| Longitud Length | 335 mm |


US-427
Pulidora neumática
Pneumatic polisher

| | |
|------------------------------------|------------|
| Velocidad en vacío Free speed | 2500 rpm |
| Entrada de aire Air inlet | 1/4" gas |
| Consumo de aire Air consumption | 120 l/min. |
| Ø Plato Ø Pad | 180 mm |
| Peso Weight | 2,4 Kg |
| Longitud Length | 320 mm |



En dotación - Supplied with:


US-427/1
 Boina de lana
 Wool polishing pad

US-427/2
 Disco lijado 7" velcro
 7" sanding pad

US-427/3
 Plato de lana velcro
 Wool polishing pad

US-342
Plato lijado manual flexible
con velcro
Flexible manual sanding
pad with velcro

- Peso - Weight: 0,15 Kg


US-887
Disco abrasivo
Abrasive pad

Es un disco laminado cónico abrasivo (se suministran en paquetes de 10 discos).

Is a conical laminar sanding abrasive pad (supplied 10 units pads box).

- Peso - Weight: 0,17 Kg


US-690, US-691, US-692/NEW
Lijadoras neumáticas de cinta
Pneumatic belt sanders


| | US-690 | US-691 | US-692/ NEW |
|-------------------------------------|-----------|-----------|----------------|
| Velocidad en vacío Free speed | 12000 rpm | 18000 rpm | 20000 rpm |
| Entrada de aire Air inlet | 1/4" NPT | 1/4" NPT | 1/4" NPT |
| Consumo de aire Air consumption | 280 l/min | 119 l/min | 119 l/min |
| Presión de trabajo Work pressure | 6,2 bar | 6,2 bar | 6,2 bar |
| Nivel de ruido Noise level | 84 dB | 84 dB | 84 dB |
| Medidas cinta Belt measures | 30x540 mm | 20x520 mm | 10x330 mm |
| Peso Weight | 2,2 Kg | 1,5 Kg | 1 Kg |
| Longitud mín. Min. length | 295 mm | 250 mm | 210 mm |
| Longitud máx. Max. length | 490 mm | 410 mm | 330 mm |

US-690/A
Cinta de lijar
Sand tape spare

- Peso - Weight: 0,19 Kg

US-691/A
Cinta de lijar
Sand tape spare

- Peso - Weight: 0,11 Kg

US-692/A
Cinta de lijar
Sand tape spare

- Peso - Weight: 0,10 Kg