


US-1248
Carro alza ruedas
Manual wheel conveyor

- Máxima movilidad
 Maximum mobility
- Rápido posicionamiento
 Fast positioning



- Potencia - Capacity: 160 Kg
- Medidas - Size: 900x450x310 mm
- Peso - Weight: 25 Kg

Carrete enrollador de aire-agua carenado, orientable
Closed hose reel swivelling in plastic for air-water

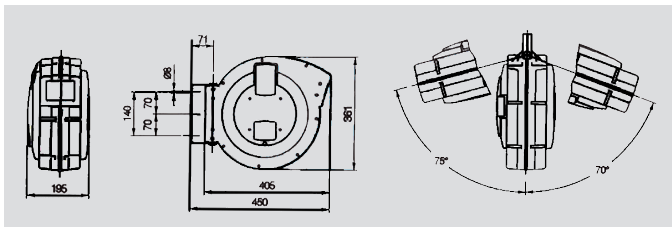

- Manueras de poliuretano azul - Polyurethane blue hose
- Emplames de latón niquelado - Nickel-plated brass connection
- Junta giratoria 90° de latón niquelado - Swivelling joint 90° nickel-plated brass
- Juntas de vitón - Viton seals

	US-928	US-928/2	US-928/3
Capacidad relativa Relative capacity	280 L/min	260 L/min	300 L/min
Tubo utilización Hose use	9 m	15 m	15 m
Tubo conexión Connecting hose	1 m	1 m	1 m
Tubo Hose	Ø 8 x 12 mm	Ø 8 x 12 mm	Ø 10 x 15 mm
Racor entrada/salida Inlet/outlet Connection	M 1/4" Gas	M 1/4" Gas	M 3/8" Gas
Presión máx max. pressure	20 Bar	20 Bar	20 Bar
Temperatura uso Use temperature	-20 °C +60 °C	-20 °C +60 °C	-20 °C +60 °C
Peso Weight	3,5 Kg	4,6 Kg	5 Kg

US-1202
Destalonador universal hidráulico
5T para vehículo industrial
Universal bead breaking



Compuesto por 3 anclajes diferentes según tipo de llanta. Las 3 garras diferentes aseguran una perfecta sujeción. Destalona usando una fuerza de 5 toneladas. Rango de trabajo de hasta 130 mm.

This heavy duty self retracting bead breaker works on all single, two and three-piece. The unit comes with 3 different claws which ensures a perfect installation. It breaks the bead using 5 Tons of force. Its working range is up to 130 mm.



- Peso - Weight: 20,7 Kg

Atención
 Bomba hidráulica no incluida
Attention
 Hydraulic pump not included


Regulador de presión con filtro incorporado y lubricador
Pressure regulator with incorporated filter and lubricator



Regulador de presión y descarga de condensación. Aplicables a todos nuestros productos. Es importante que cada equipo neumático se encuentre activado con aire sin condensación y con la presión adecuada a sus características. El regulador de presión US-471 va provisto de filtro para descarga de condensación, lubricación y manoreductor.

Pressure regulator and discharge condensation. Applicable in all our items. It's very important that each pneumatic equipment is activated with the air without condensation and with a suitable pressure following with their characteristics. The pressure regulator US-471 is provided with a filter for condensation discharge, lubrication and pressure reducer.

- Cuerpo en aluminio - Aluminum body
- Temperatura - Temperature: 5 - 60°C A
- Manómetro - Gauge: 0 - 10 bar

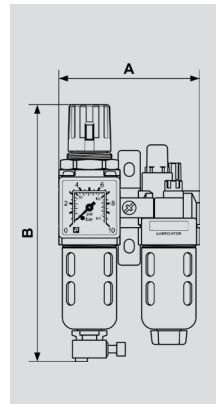

	US-471	US-471-3/8	US-471-1/2	US-471-3/4
A	90 mm	124 mm	156 mm	90 mm
B	170 mm	220 mm	280 mm	360 mm
Caudal máx. max. flow	500 l/min	1250 l/min	2800 l/min	4250 l/min
Filtración Filtration	25 µm	25 µm	25 µm	25 µm
Máx. presión Max. pressure	12 Bar	12 Bar	12 Bar	12 Bar
Rosca hembra Internal thread	G 1/4	G 3/8	G 1/2	G 3/4
Peso Weight	0,8 Kg	1,25 Kg	2 Kg	2,2 Kg